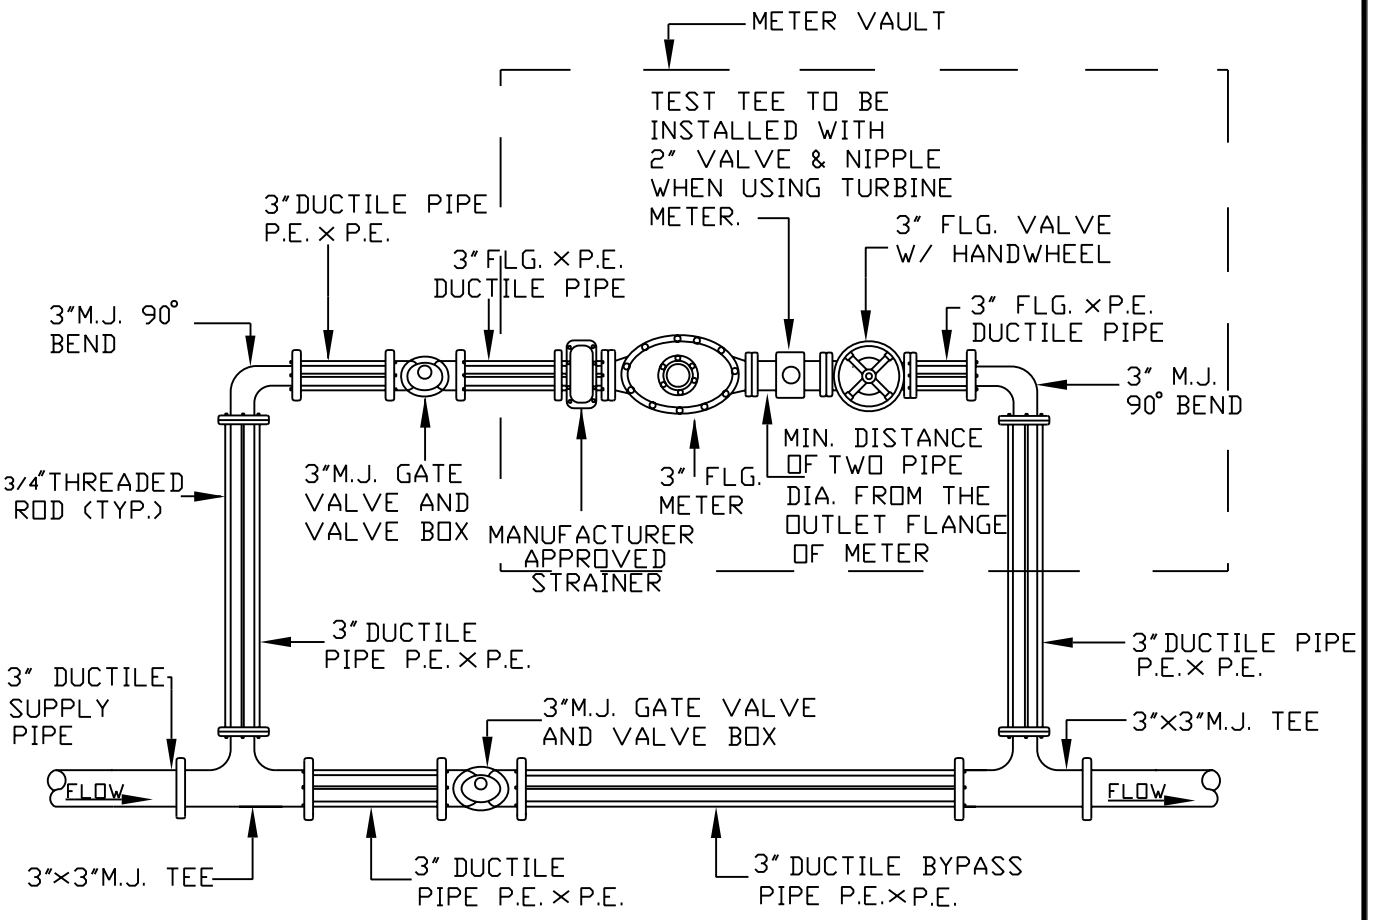

PLAN VIEW

NOTES:

1. IT IS IMPERATIVE THAT THE CONTRACTOR NOT INSTALL THE PIPING UNTIL THE METER AND ASSOCIATED APPURTENCES HAVE BEEN PURCHASED AND ARE ON THE PROJECT, SO THAT THE CORRECT LENGTH OF PIPE IS INSTALLED ACCORDING TO THIS DETAILED CONFIGURATION.
2. 3" APPROVED RESTRAINT DEVICES OR RODS ARE REQUIRED ON ALL MECHANICAL JOINT (M.J.) CONNECTIONS. PIPE SHALL BE RESTRAINED BACK TO THE VALVE. ALL FITTINGS SHALL BE M.J. AND APPROVED JOINT RESTRAINT DEVICE AT ALL CONNECTION.
3. FOR DETAILS OF VAULT, SEE MET-10.
4. WHEN INSTALLING TURBINE METER, TEST TEE SHALL BE MINIMUM DISTANCE OF TWO PIPE DIAMETERS FROM THE OUTLET FLANGE OF THE METER.
5. NO CHECK VALVE OR PRESSURE REDUCING VALVE IS ALLOWED ON THE INLET SIDE OF METER.
6. CONTRACTOR IS REQUIRED TO COORDINATE WITH THE UTILITY DEPARTMENT. THE PURCHASE AND PICK UP OF A APPROVED METER. ALL CONNECTION FEES AND/OR OTHER APPLICABLE CHARGES OR FEES MUST BE PAID TO PICK UP THE WATER METER AND STRAINER FROM THE UTILITY DEPARTMENT.
7. SET METER REGISTER 18" FROM TOP OF BOX.

DATE MAY 2004	3" METER SETTING	DRWG. NO. MET-8
HANOVER DPU		